


Board to Cable Connectors

Cable interface with connectors by crimping or solder cup, contact is easily replaced in this field, Controlled impedance from end to end with bandwidth above 12 GHz, High current capability up to 40 Amps

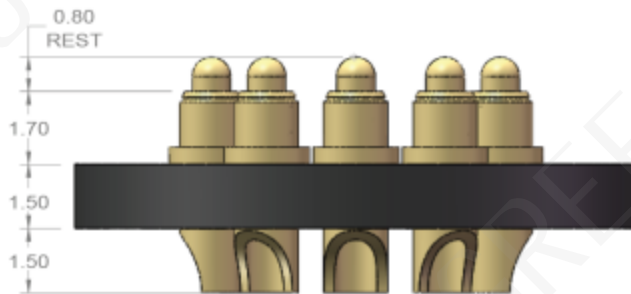

Criteria	Specification
Contact Working travel	0.60 mm
Contact max travel	0.80 mm
Base material	LCP
Pin Push-out force	700g \pm 20%
Waterproof	IP67
Contact Working Resistance	TARGET: 20 mOhms Max
Bandwidth (S21)	>5 GHz@-1dB
Current carrying	5.0A continuous